

FLCS/X-FIGHTER

Wire - Yell - SR/Data = B3 / MISO
 CLR - RED - SR/CS = F7 ICSP1

* (3) 4021 SReg. IN HANDLE

- HANDLE (AXIS) ^{HAT?} F7 / A0

- X AXIS F6 / A1

- Y AXIS F5 / A2

- 3 BTN ROW D2 / A0

3 BTN COL. BTN 1 COL B7 / B11

BTN 2 COL D6 / 12

BTN 3 COL B7 / B13

TOGGLE BTN to Right of 3 Btms)

ON (PWR) B5 / 9

OFF (PWR) B4 / 8

WIRE COLOR PIN # *4021 'CS' PIN



HANDLE 5 WIRE RIBBON ICSP HDR

WIRE COLOR	PIN #
RED.	(above) 3
ORG.	1
YEL.	4 6
GRN	2
BRN	

to F7/A0
 SCK/B1
 B3/MISO
 ICSP1
 ICSP2



* MISO IS SR-DATA PIN #1

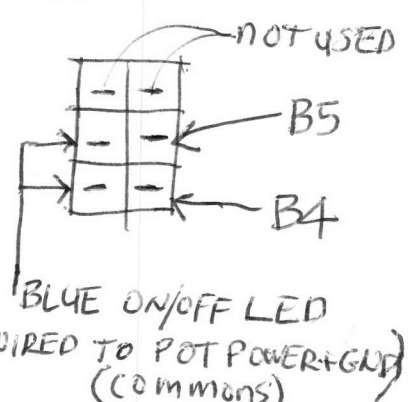

- POT LH WIRE GND PWR BLACK
 - POT RH WIRE 5V+PWR PWR BLACK

BLACK (common) GND?
 YELLOW (common) PWR

ICSP HEADER

EDGE OF BOARD